
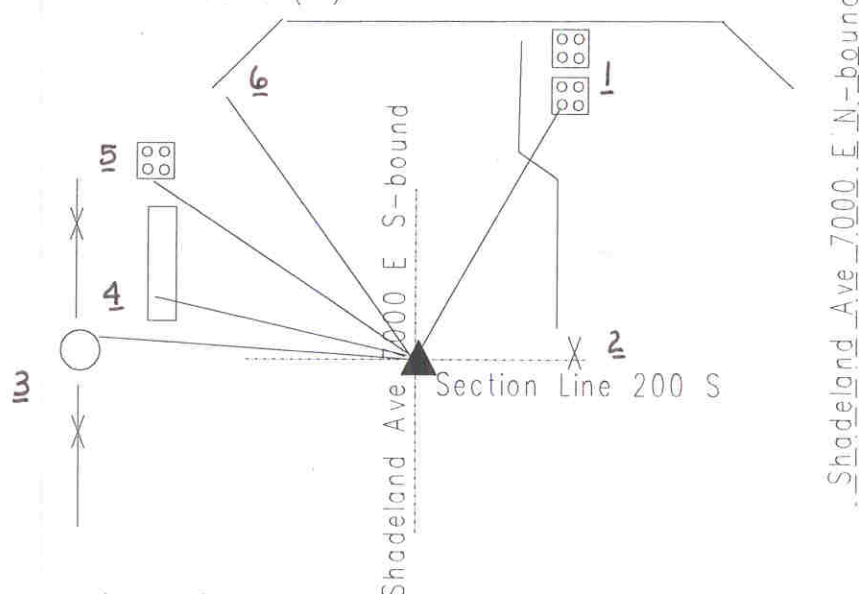


OFFICE OF THE MARION COUNTY SURVEYOR  
 SECTION RECORD CORNER  
 SECTION 12 TOWNSHIP 15 RANGE 4  
 DATE: 7-19-03  
 PARTY CHIEF: Wilcoxon  
 CREW: \_\_\_\_\_  
 TYPE OF MARKER: Harrison  
 METHOD OF ESTABLISHMENT: County: 11-30-98

IN. S.P.C. E ZONE NAD '83  
 NAME: 15041201  
 N: 501908.2142(m)  
 E: 67566.6764(m)

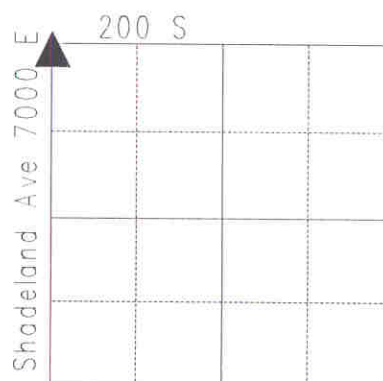

Original post set 1820 by Hendricks with witnesses: 30" sugar S 70 E 19 links; 6" ironwood N 81 W 22 links per Marion County Atlas pg. 10. Hosbrook 3-25-1850 called a set stone with witness: 10" beech S 30 E 36 links, 30" elm N 89 1/2 E 136 links per Warren Township Legal Survey Book pg. 17. Voorhis 6-10-1868 same pg. 46. Mulryan 3-10-70 called iron pin. Wilcoxon 9-9-75 called iron pin. Gries 8-29-88 called iron pin. Kiste 4-7-95 surveyed and 1/4" brass pin was found 1/2" down. Wilcoxon 4-18-95 called cut 'x' set. Cut 'x' was 0.37'N & 0.05'W of brass plug set in 1978 (set incorrectly) Excavated 11-30-98 by Wilcoxon Harrison set. Re-tied 7-19-03 by Wilcoxon.

REF.	DISTANCE	DESCRIPTION
1.	140.31'	Cut 'x' SW-bolt of sign post ( S of Railroad tracks overpass)
2.	16.72'	Due E to cut 'x' in concrete median
3.	98.10'	Cut 'x' NE chaink link fence joint post
4.	89.10'	Cut 'x' S-end of concrete headwall
5.	103.46'	Cut 'x' SW-bolt of light pole base
6.	149.21'	Cut 'x' in railroad track bridge wingwall